

4" (100mm) Bathroom Extractor Fan with Kit



- Ideal replacement bathroom fan
- Includes external grille and wall ducting
- Compact and easy to install
- IPX Rated – suitable for bathrooms
- Clip off front cover for ease of cleaning
- Single speed lubricated for life motor
- 2 year guarantee

Box Contents



Extractor Fan



300mm Telescopic Ducting



External Grille



Fitting Accessories

Standard

The product is connected to the light switch and simply turns on and off with the bathroom light.

Model: DX100


Timer

Works the same as a standard fan however, when the light is turned off the timer can be set to overrun for between 2 and 20 minutes before the fan switches off.

Model: DX100T

PLEASE NOTE: A timer fan requires a 3 wire connection NEUTRAL, SWITCHED LIVE and PERMANENT LIVE. A timer fan is not suitable for replacing a standard '2 wire' fan.


Wall Installation

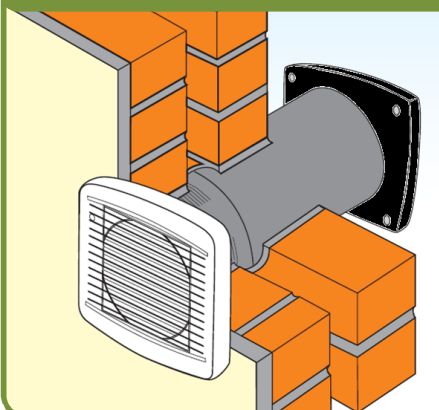

All of the components are supplied to install the DX100T fan into a wall application including screws, fixings, ducting and external grille.

The ducting supplied is telescopic and can be adjusted up to 300mm.
Hole diameter 117mm


Window Installation

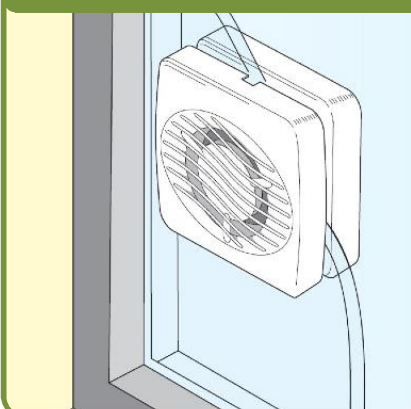

All of the components are supplied to install the DX100T fan into a single glazed window including screws, gaskets, ducting, window spacer and external grille.


Please Note: Can only be installed in to a single glazed window up to 6mm thick.
Hole diameter 125mm

Ceiling Installation



The product can be installed into a ceiling.
Hole diameter 117mm

Ducting Installation



The product can be installed into a ducted application.
Hole diameter 110mm

Product Specification...



BEAB
Approved

IPX5

Electric Requirements:
220-240V

Extraction - Metres

76 M^3 per hour

Extraction - Litres

21 Litre per second

Noise Level

35 dB(A) @ 3 meters



01733 456789
www.xpelair.com

Xpelair
Newcombe House, Newcombe Way, Peterborough. PE12 6SE

A Glen Dimplex Group company