

AR2 SHXVOFF C

ARTISAN Shower Range Artisan Thermostatic Surface Mounted Bar Shower Valve & Fast Fit Connections



Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- Flow control handle incorporates an eco button to save water, this can be overridden by the user
- Supplied with a wall mount 12 fixing kit for easier retro installation
- TMV2 thermostatic control for a higher level of performance and protection

Product Certifications:



WRAS Expiry : 31/05/2020
WRAS Cert Number : 1505023



TMV2 Expiry : 12/11/2020
TMV2 Cert Number : BC1638-1115





For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature	80
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Working Pressure Range:	Min: 0.1 bar, Max: 5 bar
Connection Inlet:	15mm compression
Connection Outlet:	G1/2"
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

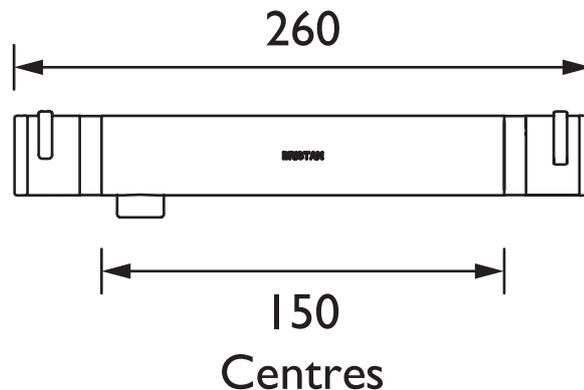

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	6.6	10.8	15.4	17.7	21.7	34.3

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D6