RS SNK EF C

RENAISSANCE Tap Range Reniassance Easyfit Sink Mixer Chrome



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal fixing nut for added durability
- Easyfit base included
- Flexible tails included

Product Certifications:




TECHNICAL

DATA

S

| Specification | |
|-----------------------------------|----------------------------|
| Product Type: | Kitchen Taps |
| Main Construction Material: | Brass |
| Mount Type: | Deck Mounted |
| Handle Type: | Lever |
| Connection Inlet: | 1/2" BSP Flexible Tails |
| Connection Outlet: | Open |
| Number of Tap Holes: | 1 |
| Valve/Cartridge Type: | 1/2" Ceramic Disc Valves |
| Plumbing System Requirements: | All, Preferably Balanced |
| Working Pressure Range: | Min 0.4 Bar, Max 5.0 Bar |
| Maximum Hot Water Temperature: °C | 65 |
| Maximum Static Pressure: (bar) | 10 |
| Flow Type: | Single: Single Flow /Dual: |
| Isolation Included: | Yes |

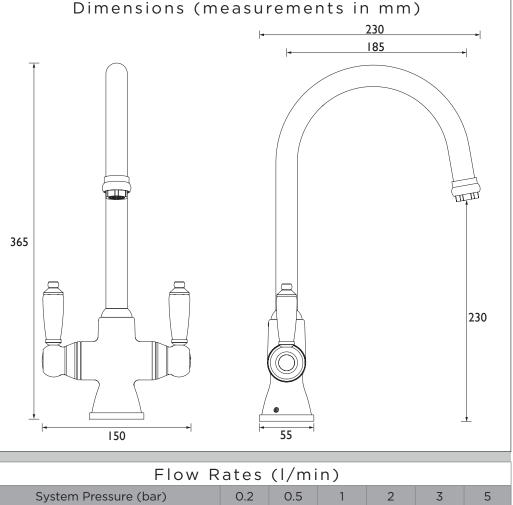

RS SNK EF C 12.2 13.6 19.2 27.2



33.3

43

D4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

Check out our full range of Showers

- Electric Showers Digital Showers Mixer Showers Power Showers Smart Showers
- Shower Towers

From Top Shower Brands

Mira Showers Aqualisa Showers Triton Showers

Gainsborough Showers

Shower Pumps can upgrade your showering experience even more

Stuart Turner Shower Pumps Salamander Shower Pumps Grundfos Shower Pumps

