
STRAIGHT FLUTED



- Two flutes give a clean finish to the cut edges.
- All cutters are suitable for plunge routers unless stated.
- Cutters above and including 9.5mmØ have TCT plunge centre tip. •
- For cutters with extra long shanks, see 'Pocket Cutters' on page 8.

KEY TO PRODUCT REFERENCES

- Prefix S = Solid Tungsten Carbide (STC).
- Suffix D = Especially suited for drilling.
- Suffix M = Short shank for Makita 3600B & 3612BR, Ryobi & Hitachi routers.
- Suffix C = Conventional ground for additional clearance.
- + Solid Carbide insert. Handle small diameter cutters with care, take shallow passes.
- No centre TC tip, so not suitable for plunging abrasive materials.
- For hollow board worktop only. Use on a router with 80mm plunge and С one-piece multi-slit collet. w
 - For use with Trend Worktop Jigs.
- For use with Trend Hinge Jigs. н
- Note Diameter dimensions shown in **bold** denote exact size.

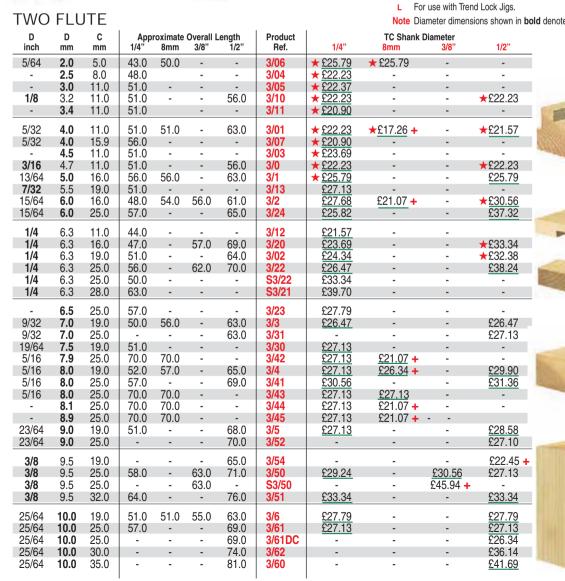









۲

Ø

Ref. 3/81

and a

rend

5

61.20

23

X flor

Ref. 4/2

E

"puort

z

Ref. 3/11

nd"

015

С

25 4mm (1")

19.1mm (3/4")

15.9mm (5/8")

12.7mm (1/2")

9.5mm (3/8")

6.3mm

(1/4")

10