

PANEL TRIMMING Super fine finish

For super fine trimming of panels. They have a triple chip tooth design with a positive hook for super fine finish.



	IPLE OTH	_		,
	-			
Blade	Quick Selector	Dia.	Dia. inch	No.
Type	No.	mm	Nom	Teet

Blade	Selector	Dia.	inch	No. of	Bore	Kerf	Plate		
Туре	No.	mm	Nom	Teeth	mm	mm	mm	Product Ref.	Price
	7	160	6-1/4	48	20	2.6	1.6	PT/160X48X20 +	£71.52
	7.1	160	6-1/4	48	20	2.2	1.6	PT/160X48X20A** +	£57.31
	15	190	7-1/2	60	30	2.8	1.8	PT/190X60X30 +	£85.44
	20	220	8-5/8	64	30	3.0	2.0	PT/220X64X30* +	£95.50
	25	250	10	80	30	3.2	2.2	PT/250X80X30 +	£100.73
	29	300	12	96	30	3.2	2.2	PT/300X96X30 +	£118.86
				**	For plur	ide sav	/ (+4° ho	ook) *PT/220 for use on	wall saws.




RADIAL ARM CROSSCUT & SNIP-OFF Coarse, Medium or Fine finish

For crosscutting applications. These **ALTERNATE TOP** blades have a zero hook angle to minimise 'pick-up' and 'snatching'




	VEL RM	то	_	1	<u> </u>		° hook 5° hook		Plate
Blade Type	Quick Selector No.	Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Kerf mm	Plate mm	Product Ref.	Price
0	C18A	215	8-1/2	48	30	2.8	1.8	CC/215X48X30	+ £73.26
00	C19.2	216	8-1/2	36	30	2.53	1.8	CC/216X36X30	+ £55.31
\bigcirc	C19.2	216	8-1/2	60	30	2.53	1.8	CC/216X60X30	+ £68.47
0	C28.2	260	10-1/4	60	30	2.5	1.8	CC/260X60X30	+ £58.89
00	C28.2	260	10-1/4	80	30	2.5	1.8	CC/260X80X30	+ £80.79

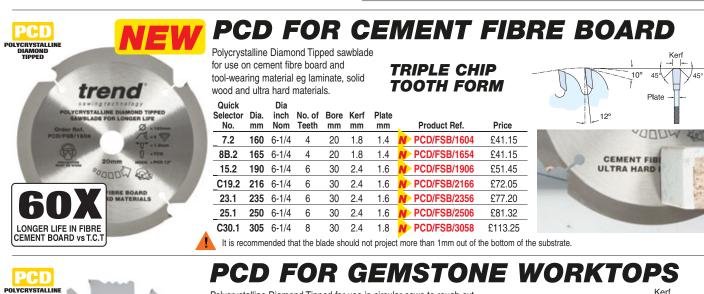



Polycrystalline Diamond Tipped for use in circular saws to rough cut Gemstone worktop. Eight high quality industrial PCD tips for roughing cut leaving 5mm overhang for router trimming. Blade can also be used on cement bonded board.



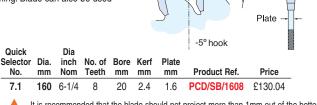

It is recommended that the blade should not project more than 1mm out of the bottom of the substrate.

PROFESSIONAL SAWBLADE BUSHING WASHERS (REDUCING RINGS)

Accurately machined with reamed bores and splined outside edges for a precision fit into the blade bore of Trend sawblades only.

Thickness 1.4mm. Take extra care when mounting sawblades onto a saw machine spindle.

All Bushing Washer Refs. BW.. Priced at £4.34 each.

Bushing washers supplied to reduce bore diameter for certain makes and models of saw. Bushing washers must be pressed or glued into blade body of Trend Professional 'Waveform' and Industrial sawblades only. Loose bushing washers/rings must not be used.

Outside Dia. mm (OD)	Inside Dia. mm (ID)	Product Ref.	Outside Dia. mm (OD)	Inside Dia. mm (ID)
20	16	BW17	30	20
25	20	BW4	30	25
30	15	BW24	30	25.4 (1")
30	15.9 (5/8")	BW6	31.8 (1-1/4")	30
30	16	BW45	32	30
30	18	BW25	32	25

Inside Dia. mm (ID)	Product Ref.
20	BW15
25	BW12
25.4 (1")	BW14
30	BW20
30	BW29
25	BW30
	mm (ID) 20 25 25.4 (1") 30 30

rend

10°

113