

EASYSET

All in one system for quick setting.

- These tools produce the same type of joint and use the same components as the combination PSC sets.
- Both parts of the joint are cut by only changing the cutter height.
- No re-assembly of parts is required to convert the tool from scribing mode to profiling mode and vice-versa.

⚠ When using PSC sets at the minimum material thickness, the height of the top quirk may be reduced.

⚠ Router table use only. 18,000




INST
Instructions supplied



BEARING GUIDED CLASSIC SET




Timber thickness
Min. 18.0mm
Max. 22.0mm

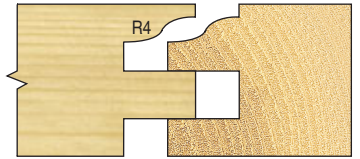



R mm	D mm	C mm	C2 mm	B mm	Product Ref.	Shank Dia. 1/2"
4.0	41.0	11.0	6.3	22.0	PSC/101	£116.65

BEARING GUIDED FLAT CLASSIC




Timber thickness
Min. 18.0mm
Max. 22.0mm





R mm	D mm	C mm	C2 mm	B mm	Product Ref.	Shank Dia. 1/2"
3.5	41.0	11.0	6.3	22.0	PSC/103	£116.65

BEARING GUIDED RAISED BEVEL



Timber thickness
Min. 18.0mm
Max. 22.0mm

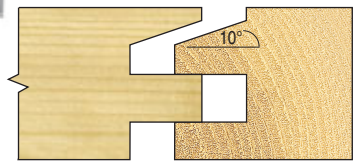


A Deg.	D mm	C mm	C2 mm	B mm	Product Ref.	Shank Dia. 1/2"
10°	41.0	11.0	6.3	22.0	PSC/105	£116.65

BEARING GUIDED OVOLO



Timber thickness
Min. 21.0mm
Max. 26.5mm





R mm	D mm	C mm	C2 mm	B mm	Product Ref.	Shank Dia. 1/2"
10.0	46.0	15.0	6.3	22.0	PSC/106	£116.65

BEARING GUIDED OVOLO



Timber thickness
Min. 21.0mm
Max. 26.5mm

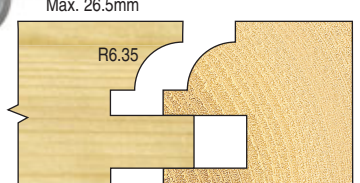

R mm	D mm	C mm	C2 mm	B mm	Product Ref.	Shank Dia. 1/2"
6.35	46.0	15.0	6.3	22.0	PSC/107	£116.65