

PROFILE SCRIBING TOOLING

COMBINATION & EASYSET


the arbor to cut the profile or the scribe.

• The classic method of producing cabinet panelled door and

drawer fronts is made easy with these Profile Scriber sets.

• With the combination type, components are re-arranged on

. The Easyset system works by altering the height of the cutter.







Instructions supplied

Timber thickness Min. 18.0mm


Max. 22.0mm




18.000

Router table use only. 1/4" and 8mm shanks should only be used in the base may need to be enlarged. A workholding device should be used when cutting the scribe cut on the rail ends. The cutting

with a medium or heavy duty router. For certain routers the aperture edges should be staggered to each other. When using Easyset cutters, take several passes. When using these sets at the minimum material thickness, the height of the top quirk may be reduced.

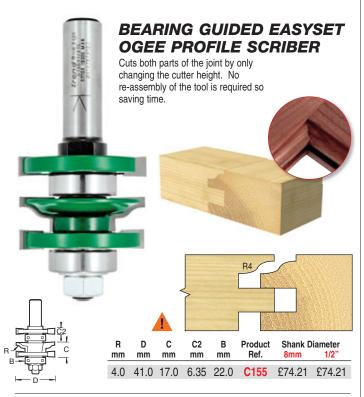

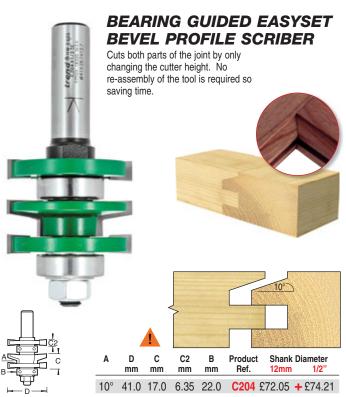

BEARING GUIDED COMBINATION

