

BIRDSMOUTH CUTTER

To make round boxes, planters, barrels, or other multi-sided components.

Ref. 10/50 for 6 or 12-sided boxes for material 20mm or 12mm max. thickness.




Ref. 10/50



Ref. 10/51

Ref. 10/51 for 8-sided boxes for material 20mm max. thickness.



10/50

6 sided

8 sided 12 sided



| A Deg. | D mm | C mm | Product Ref. | Shank Dia. 1/2" |
|--------|------|------|--------------|-----------------|
| 30/60° | 41.0 | 22.0 | 10/50 | £63.60 |
| 45° | 38.0 | 22.0 | 10/51 | £58.30 |

MITRE LOCK JOINTER

MITRE LOCK JOINTER

Machining of this joint is carried out by routing one piece with the inside face on the table. The matching corner inside face is machined upright against the fence.

Make sure that the cutter is centred on the workpiece. The cutter can also be used for a glue joint to join lengths together. Ideal for speaker cabinets and drawer construction.

Please note. These tools cannot be re-sharpened. Inverted use only.




Ref. 10/99

| A Deg. | D mm | C mm | C2 mm | Product Ref. | Shank Diameter 1/2" |
|--------|------|------|-------|--------------|---------------------|
| 45° | 68.0 | 30.0 | 12.5 | 10/99 | £106.04 |


Instructions supplied

Timber thickness
Min. 8.0mm
Max. 12.0mm





BUTTERFLY SPLINE CUTTER

A decorative joint for butterfly keys and splines. Use in conjunction with 104° (14°) dovetail cutters Ref. L120, 31/33, 31/12, 31/23, 31/25 & 31/50. For use in router tables.



See Arched Mirror project at www.trend-uk.com

Instructions supplied





| A Deg. | D mm | C mm | Product Ref. | Shank Dia. 1/2" |
|--------|------|------|--------------|-----------------|
| 104° | 28.5 | 44.0 | 10/40 | £68.82 |

DRAWER LOCK JOINTER

To increase gluing area, producing a strong joint in drawer production.

Timber thickness
Min. 15.0mm
Max. 25.0mm

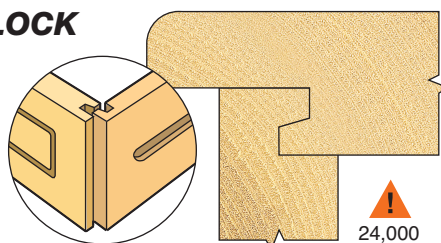

| D mm | C mm | Product Ref. | Shank Diameter 1/2" |
|------|------|--------------|---------------------|
| 25.4 | 12.7 | 10/30 | £41.02 |


BEARING GUIDED KNUCKLE JOINT CUTTER

Cutters to create knuckle joints for gate leg tables. The cutter should be used in a router table. Hand tools will be required to finish the joint.


Timber thickness:

Ref. 9/41 For 14.0mm to 15.0mm.

Ref. 9/42 For 19.0mm.



Ref. 9/42



9/41



9/42

| A Deg. | R mm | D mm | C mm | B mm | Product Ref. | Shank Dia. 1/4" |
|--------|------|------|------|------|--------------|-----------------|
| 45° | 7.14 | 23.8 | 17.0 | 9.5 | 9/41 | £35.66 + |

Instructions supplied

24,000

