


DRAINING GROOVE JIG

For routing draining grooves in solid timber and Corian® for Belfast type sinks.

- Made from 12mm hardwearing CNC machined phenolic.
- Provides a 0.5° fall.
- Grooves at 50mm pitch and 455mm long.
- Sight marks for lining up.
- Three removable sloping runners for support.
- Cutter diameter check hole.
- Fixing holes for user-made stops for repetition work.

DG/JIG £134.73

Size: 625 x 585 x 12mm, weight 4.3kg.



HEAVY DUTY GRIPPER CLAMPS

See page 210 for full details.

Product Ref.

FC/200

FC/300

FC/500



INCLUDES:

- 1 x 30mm Guide bush
- 1 x 1/2" shank TCT 9.5mm radius cove cutter



SPECIFICATION:

| | |
|---------------|-------|
| Fall | 0.5° |
| Groove pitch | 50mm |
| Groove length | 455mm |
| Slat width | 19mm |

REPLACEMENT PARTS:

| | Product Ref. | Price |
|-----------------------------|--------------------|--------|
| 1. R9.5mm cove cutter | C056AX1/2TC | £34.14 |
| 2. Guide bush 30mm diameter | GB30 | £9.14 |

OPTIONAL ACCESSORIES:

| | Product Ref. | Price |
|--|--------------------|--------|
| 3. Cove cutter R6.35mm for narrower groove. | C054AX1/2TC | £30.75 |
| 4. Carry case | CASE/DG | £34.10 |



CABINET DOOR HINGE TEMPLATE

For use with a plunge router to cut 26mm and 35mm diameter blind holes for circular cabinet door hinges.

- Cuts accurate recesses for either 26mm or 35mm circular hinges.
- Use with a 12.7mm (1/2") diameter router cutter and 30mm guide bush.
- Adjustable and removable alloy end stop for adjustment of recess position from top and bottom of door (normal position 100mm).
- 3mm and 5mm offset location holes to accurately position the recesses relative to the edge of the door.
- Made from hard wearing 12mm thick high pressure laminate with engraved centre sight lines.
- Pin holes reversible for left hand or right hand doors.

TEMP/CDH/A £57.29

Size: 355 x 220 x 12mm, weight 1.2kg.



Cuts circular hinge holes 26mmØ & 35mmØ

INCLUDES:

- 4 x Pins




SPECIFICATION:

| | |
|---|------------|
| Recess position range from top/ bottom of door. | |
| Ø 26mm | 50 - 105mm |
| Ø 35mm | 50 - 190mm |
| Offset from edge | 3mm or 5mm |

REPLACEMENT PART:

| | Product Ref. | Price |
|---------------------------------------|-------------------|-------|
| 1. Pins 10mmØ (ABS plastic pack of 4) | KWJP/PIN/4 | £7.37 |

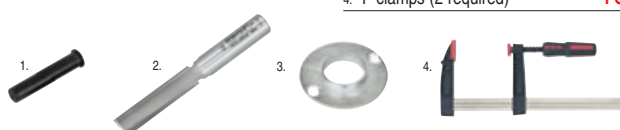

ACCESSORIES:

| | Product Ref. | Price |
|-------------------------------|--------------------|--------|
| 2. Professional router cutter | 3/83DX1/2TC | £38.36 |
| 3. Guide bush 30mm diameter | GB30 | £9.14 |
| 4. F-clamps (2 required) | FC/200 | £16.03 |