



Sprayers. Misters. Blowers. Granulate spreaders.

SOLO – pioneers of mobile plant protection technology



Four tips to help you choose the right product

Pressure sprayer or backpack sprayer?

The answer to this question often depends on the size of the area to be treated. If it's on the small side, a pressure sprayer with shoulder strap will suffice. For larger areas, backpack sprayers are more suitable as they are comfortable to carry and have a larger capacity. All that is left to decide is whether you want to operate the pump manually or let a battery or petrol driven unit do the work for you.

Tall plants?

If you need to treat tall plants, you should use extension wands. They will help you reach the right places and apply the medium more accurately. As well as being made of plastic material, spray wands are also available in robust brass or even ultra-light carbon. The telescopic carbon spray wand, which can be extended up to 230 cm, weighs just 160 g. This protects the joints even during longer working periods.

Liquid or solid?

All SOLO sprayers are designed for applying liquid media. However, the nozzles vary depending on the application: flat spray nozzles for ground spraying, hollow cone nozzles for individual plants, insecticides and fungicides. Herbicides are best applied with deflector nozzles. With solid granulate, SOLO 421 is the product of choice. It distributes the medium evenly over the required area — and can also be used in winter to apply gritting salt to pathways.

When to use a mister rather than a sprayer?

In large scale agricultural plantings, orchards, horticulture, vineyards and in many other cultivated plant stocks around the world, it is crucial for the media to successfully reach and penetrate the crops. SOLO power misters are designed to accomplish precisely this. They generate a powerful air flow which splits the plant protection medium into fine mist to cover all the required parts of the plant effectively.

Classic, Comfort or Pro...

SOLO CLASSIC

SOLO COMFORT

SOLO PRO

Whether you're an occasional user, a discerning private user or a professional, you're guaranteed to find the right product to suit your requirements in one of our three equipment lines.

It goes without saying that even our CLASSIC sprayers are of the same high quality you would expect from all SOLO products. The differences are found in the equipment features and ease of use. For example, all sprayers in the COMFORT series and above are fitted as standard with FKM seals ("Viton®") in all the important places. Moreover, the PRO backpack sprayers feature a lightweight, telescopic spray wand and are especially comfortable to wear, preventing tiredness even after prolonged periods of use.

The two battery-operated sprayers, two power sprayers and two power misters are not only lightweight but also offer a powerful output. Whether they use electric motors, 2-stroke SOLO engines or 4-stroke Honda engines, these tools combine high levels of performance and top quality. In addition to sprayers and misters, the PRO series also features the 421 granulate spreader and the 467 backpack blower.


SOLO – the right choice for any application

Sample applications for SOLO sprayers and misters		403	408	401	461	456	456	425/435	425/435	475	425	416 Li	433	423
		404	409	402	462	457	PRO		Comfort	Comfort	PRO	417	434	451
			453			458		Classic						
	Plants on balconies and patios													
_	Private gardens, decorative plants, shrubs		•	•	•	•	•	•						
Plant protection	Large private gardens, decorative plants, shrubs, plantings				•	•	•	•	•			•	•	
ote	Professional horticulture and landscaping, greenhouses					•	•	•	•	•	•	•	•	
t pr	Espaliered trees, trees							•	•		•	•	•	•
lan	High trees												•*	•
_	Weed control		•		•	•	•	•	•			•		
	Agricultural crops in general								•	•		•	•	•
ē	Large scale plantings, such as orchards, vineyards, plantations and horticultural operations													•
롺	Plant protection					•	•		•				•	•
Agriculture	Disinfection													•
Α̈́	Pest control													•
Woodland naintenance	Plant care						•			•	•	•		
Wood	Protection against game attack						•				•			

*With suitable accessories















Eliminate pests Care for and fertilise lawns Care for and fertilise plants

Eliminate bacteria

Are you looking for a sprayer or foam sprayer that is specially designed for cleaning agents and disinfectants? Then ask about our **CLEANLine** sprayers.

Where can you find what you need in this catalogue?

05
09
09
13
17
21
25
28
29

Specification	30
Spray wand accessories	32
Nozzle accessories	34
Accessories for sets of seals	35
Other accessories	36
Accessories for power sprayers	37
Accessories for misters	38
Engine oil, maintenance oil, etc.	39





MANUAL SPRAYERS

Manual sprayers are an inexpensive and indispensable aid for a variety of applications around the home.

Plants on balconies and patios, and of course decorative indoor plants too, are easy to look after with these compact devices.

Robust pumps reach the required operating pressure after just a few strokes. Once the pressure is reached, you can apply almost the entire content without additional pumping. The integral safety valve protects the appliance against excess pressure build-up.

The high quality hollow cone nozzle is fully adjustable — from a direct jet to the finest mist. The robust containers have a large filling aperture to prevent spills when being filled and emptied, and their stable base stops them overturning when full. The underside of leaves can be optimally treated with the 401 and 402 models: the pivoting nozzle and small drift guard ensure the spray medium is only applied where actually needed.





MANUAL SPRAYERS



- 01 Sturdy pump lever
- 02 Automatic safety valve
- 03 Comfortable trigger
- 04 Large filling aperture

- Ergonomic robust handle that can also be gripped with gloves
- 06 Transparent tank with scale
- 07 Moulded feet for a firm footing
- 08 Adjustable universal nozzle

- O9 Stainless steel spray wand with adjustable, 180° pivoting universal nozzle and drift guard
- 10 High quality FKM seals ("Viton®")

MANUAL SPRAYERS

SOLO 403

Inexpensive manual pressure sprayer with nominal capacity of 1.25 I. For plant protection and care inside the house, on patios, balconies or in conservatories. 1.25 I, 2 bar, 0.5 kg
Part no. 40301



SOLO 404

As per SOLO 403, but with nominal capacity of 2 I. 2.0 I, 2 bar, 0.6 kg Part no. 40401



SOLO 401

Robust manual pressure sprayer for semiprofessional activities. Equipped with high quality FKM seals ("Viton®"). The pivoting universal nozzle enables an even greater application range.

1 l, 2.5 bar, 0.4 kg Part no. 40101



SOLO 402

As per SOLO 401, but with nominal capacity of ${\bf 2}$ I.

2 l, 2.5 bar, 0.5 kg



Greater reach:

For the two manual sprayers in the Comfort line, SOLO 401 and 402, a practical accessory is available in the form of a telescopic wand (49628), which can be extended from 25 to 50 cm as required. The telescopic function improves access to parts of plants that are further away or hard to reach. For example, the nozzle head can be pivoted through 180°, making it convenient and effective to treat the underside of affected leaves.







PRESSURE SPRAYERS

SOLO pressure sprayers with shoulder strap have long been popular and reliable aids in private gardens or for countryside management. They do not take up much storage space and are ready for immediate use whenever required. Various tank volumes are available, depending on the size of the garden. The 5 litre model is the most popular for garden applications. For larger areas, 7 to 9 litres may be preferable. The intensity of use also plays an important role, of course. Occasional users have the choice between the 408 and 409 entry level models, and the 461 or 462 all-rounders from the Comfort line. Use the convenient mobile 453 trolley sprayer to cover longer distances with ease between spray locations.

If the terrain is fairly rugged and the application of a more professional nature, such as in horticulture and landscaping, or in agriculture and forestry, we recommend the 456, 457 or 458 professional pressure sprayers. With a wall thickness of 7 mm, their tanks are some of the most robust on the market. Even an accidental tumble from their storage area or similar tough tests are no problem for these professional pressure sprayers.

With resistance to UV rays, the transparent tanks are all set for a long service life. Comprehensive accessories, such as extension wands, drift guards and different nozzles for a variety of applications make the SOLO pressure sprayers even more versatile to use.





PRESSURE SPRAYERS



- 01 High quality nozzles (408/409 adjustable universal nozzle)
- Flexible spray wand for the toughest mechanical applications
- Spray wand retainer; two clips for the 456-458: for plastic and brass spray wands
- Removable top section with large aperture to facilitate filling, draining and cleaning
- O5 Safety valve automatically compensates in the case of excess pressure inside the tank
- **06** Long, broad, practical strap
- Extra large piston pump operating pressure achieved after just a few pump strokes
- **08** Stable reinforced hose with ergonomic handle
- Transparent pressure sprayer tank for good visibility of the spray medium level, made from polyethylene with UV resistance

PRESSURE SPRAYERS

SOLO 408

Entry level model with lightweight, 5 I tank, 40 cm plastic wand and adjustable universal nozzle. Suitable for occasional use in small private gardens.

Piston pump, 5 l, 1.2 kg Part no. 40801

SOLO 409

As per SOLO 408, but with nominal capacity of 7 I. Piston pump, 7 l, 1.4 kg Part no. 40901

SOLO 453

Plant maintenance made easy: the large wheels of the SOLO 453 trolley sprayer make it easy to pull along, facilitating work involving long distances, whether moving through a garden or transporting to site. Yet the use of aluminium for the robust handle keeps the weight right down. The dry weight is a mere 3.5 kg. Just a few pump strokes are enough to build the necessary pressure inside the 11 litre tank. The pump handle is large and robust enough to be securely gripped with gloves. The same applies to the tank handle with its soft grip sleeve. A 2.5 m spiral hose provides the necessary reach.

Piston pump, 11 I, 3.5 kg Part no. 45301



SOLO 461

An indispensable aid in many private gardens for plant protection, treating weeds and applying insecticide. Stable 5 litre tank, 50 cm spray wand and SOLO flat spray and hollow cone nozzle. Piston pump, 5 l, 1.5 kg Part no. 46101



SOLO 462

As per SOLO 461, but with nominal capacity of 7 l. Piston pump, 7 l, 1.7 kg Part no. 46290



to store nozzles

SOLO 456

The cream of the crop amongst pressure sprayers, with top performance even in tough, continuous use.

Extremely stable 5 litre tank, unbreakable 50 cm plastic wand and SOLO flat spray and hollow cone nozzle. Piston pump, 5 l, 2.6 kg Part no. 45601



SOLO 457

As per SOLO 456, but with nominal capacity of 7 I. Piston pump, 7 l, 2.8 kg Part no. 45701



SOLO 458

As per SOLO 456, but with nominal capacity of 9 I. Piston pump, 9 l, 3.0 kg Part no. 45801





BACKPACK SPRAYERS

When it comes to plastic backpack sprayers, we have decades of experience, having started producing full plastic sprayers back in 1960.

The lightness of the material on the one hand and its durability on the other are just two good reasons to choose SOLO backpack sprayers.

Starting with the Comfort models, the backpack sprayers are also equipped with highly resistant FKM seals ("Viton®") for applying aggressive liquids. There are four pressure settings so you can apply precise quantities.

With abrasive fluids, the 473D and 475 sprayer models with diaphragm pump are the ideal choice, as the special Tivilon diaphragm in their pumps is highly robust. With either piston or diaphragm, the pumps in the SOLO backpack sprayers are

some of the most effortless and efficient on the market. Longer operating times are therefore simple to achieve, thanks also to the exceptional straps, inspired by the outdoor sports sector on the 425 PRO models. Comfortable and padded, they can be adjusted in various ways for a perfect fit – also available as accessories.

The UV-resistant tanks come in three sizes: 10, 15 or 20 litres. They are translucent so the fill level is easily visible. The tank is filled and drained through a large filler neck. For convenient transport, the Comfort and Pro models with 15 litre tank feature a carrying handle with built-in spray wand retainer.

See page 32 onwards for our extensive range of accessories. These can be used to further extend the usage options of these highly resilient sprayers.



BACKPACK SPRAYERS



- Impressive spray performance, two nozzles as standard
- Ergonomically refined, rotating, lengthadjustable pump lever (Comfort/Pro), individual pump lever mounting for right/ left-handed users
- 03 Wide, comfortably padded straps with strain relief; Pro models with special backpack carrying system
- **04** Large filling and cleaning aperture

- Carrying handle with spray wand retainer (Comfort/Pro)
- - Ergonomic tank design:
 high quality plastic resistant to UV rays
 non-pressurised tank with separate air chamber

 - fill level markings low inherent weight
 - clearly visible spray medium level
- Resistant FKM seals ("Viton®") for all approved spray liquids (Comfort/Pro)

- High grip manual valve with pressure gauge connection for precisely metered spray volume
- Long reinforced hose for extended reach
- Effective, smooth-running pump 4 manual spray pressure settings (Comfort/Pro)
- 11 Stable tank frame

BACKPACK SPRAYERS

SOLO 425 CLASSIC

A true all-rounder, proven millions of times over, for plant protection applications. Simple, easy to service and robust design. Pump lever can be fitted on the right or left side. Piston pump, 15 l, 4.4 kg

Part no. 42521



SOLO 435 CLASSIC

Identical to 425 CLASSIC, but with nominal capacity of 20 I. Piston pump, 20 l, 5.0 kg



SOLO 473D CLASSIC

Sprayer with nominal capacity of 10 I and diaphragm pump for applying abrasive fluids. Pump lever can be fitted on the right or left

Diaphragm pump, 10 l, 4.2 kg



SOLO 475 CLASSIC

A classic with a nominal capacity of 15 l and diaphragm pump. For abrasive fluids. Diaphragm pump, 15 l, 4.6 kg Part no. 47521



SOLO 425 COMFORT

Better equipped for greater comfort: fully adjustable pump lever for ergonomic operation and practical carrying handle with integral spray wand retainer. In addition, the pressure can be switched to one of four settings. Piston pump, 15 l, 4.5 kg



SOLO 435 COMFORT

As per 425 COMFORT, but with nominal capacity of 20 I and no carrying handle. Piston pump, 20 l, 5.1 kg Part no. 43531



SOLO 475 COMFORT

The diaphragm pump model is generally used in conjunction with relatively viscous herbicides in the low pressure range. Diaphragm pump, 15 l, 4.7 kg Part no. 47531



SOLO 425 **PRO**

The ultimate backpack sprayer. Professional carrying system, telescopic spray wand with high quality brass nozzles and pressure gauge are standard features with this model. Piston pump, 15 l, 5.2 kg Part no. 42541



Backpack sprayers don't come better than this

The SOLO 425 PRO professional model, with its premium features, is designed specifically for professional users. Those who work long hours with a backpack sprayer on a daily basis will appreciate the comfortable and fully adjustable backpack carrying system, inspired by the outdoor sports sector, which has been optimised for maximum user comfort. The spray wand and nozzles of this sprayer also meet the needs of professionals: the lightweight plastic wand can be adjusted between 50 cm and 90 cm. The standard delivery includes high quality brass nozzles: flat spray and hollow cone (adjustable)







BATTERY-OPERATED SPRAYERS

The 416 Li and 417 battery-operated sprayers from SOLO are whisper-quiet and free of emissions. With their powerful electric drives, they are the ideal choice when it comes to plant protection in enclosed spaces with large areas requiring treatment. Efficient working practices and high performance are called for in conservatories and greenhouses, too. Of course, these two battery-operated sprayers also perform well outdoors. With one press of the Power button, the powerful pump is barely noticeable but for a quiet humming sound. Even at the second power setting, the sound emissions are hardly any more audible.

This ensures a pleasant working environment without the need for ear protectors.

These two power settings regulate the pressure range of the powerful 12 V pumps to up to 4.3 bar. When the battery runs out, it can be quickly recharged inside the appliance.

Compared to the lead gel battery in the 417, the 416 Li has a lithium-ion battery, and a capacity of 20 rather than 18 litres. Last but not least, the sprayers include a lightweight, 50 to 90 cm telescopic wand made from carbon.



BATTERY-OPERATED SPRAYERS



- 01 1.5 m long reinforced hose
- Robust manual valve with vibration-dampened pressure gauge
- 03 Seals resistant to all approved spray liquids
- 04 Large filling and cleaning aperture (with quick-action closure on the 416 Li)
- 05 Integrated tank fill level scale
- Ergonomically shaped tank made from UV-resistant plastic with comfortable padded backpack frame, wide shoulder straps and waist strap (416 Li)
- O7 Almost unbreakable plastic spray wand (417) or carbon telescopic spray wand (416 Li)
- Robust electric pump in impact-resistant enclosure; two settings for pressure and spray volume
- 09 Flat spray nozzle 03-F80, ISO standard compliant (with ball valve filter for the 416 Li)
- Powerful, maintenance-free battery 416 Li model: lithium-ion battery

BATTERY-OPERATED SPRAYERS

SOLO 417

The entry level model for batteryoperated plant protection sprayers is the SOLO 417. The powerful lead gel battery provides up to 3.7 hours of operation and is recharged after 8 hours. The lightweight, transparent plastic tank can hold 18 l. A 50 cm plastic spray wand with high quality nozzle and pressure gauge are included as standard. Lead gel battery 12 V/7.2 Ah, 18 l, 7.6 kg Part no. 41701

SOLO 416 Li

For professional use in commercial nurseries and greenhouses, or for everyday horticulture and landscaping tasks. The powerful lithiumion battery ensures 5.9 hours of continuous operation and recharges in just 5.5 hours.

- Additional features of the 416 Li: + Heavy duty lithium-ion battery with up to 5.9 h runtime
- + Large tank lid with quick-acting closure
- + Removable stainless steel filling strainer
- + 50-90 cm telescopic carbon spray
- + Space saving vertical spray wand retainer
- + Low inherent weight Lithium-ion battery 11.1 V/7.8 Ah, 20 l, 5.2 kg Part no. 41601



Expand your options - with matching accessories from SOLO

Reach tall plants with ease using an longer spray wand – available in plastic, brass or even ultra-lightweight carbon versions. The latter has a reach of up to 230 cm. Choosing the right nozzle is also important. The flat spray nozzle is the first choice for treating large areas, whereas herbicide can be applied with pinpoint accuracy using deflector or full cone nozzles, plus drift guards to prevent the media drifting into adjacent areas. Detailed descriptions of SOLO's







POWER SPRAYERS

Our power sprayers are characterised by their high efficiency over larger areas. This combination is applicable for very tall plantings such as trees and large shrubs, areas containing crops, or in professional horticulture and landscaping.

For the SOLO 433, the necessary power is delivered by a 4-stroke HONDA engine; for the SOLO 434 by a 2-stroke SOLO engine. Both have special bearings to protect them from vibrations, are easy to start and simple to service. The adjustable operating pressure of the push-pull piston pump reaches up to 30 bar, generating the necessary distribution distance. Long working stretches without refilling are ensured by nominal capacities of 18 or 20 litres.

A practical drain connector underneath the tank enables complete draining of any leftover liquid. Both models are equipped with a 50 cm stainless steel spray wand and a pressure gauge on the sturdy handle, which allows the pressure to be adjusted for any application. Supplied with a high quality twin nozzle, with stainless steel nozzle discs. With the right accessories (see page 37), you can discover the versatility and all the advantages of these power pressure sprayers. For example, increase the reach with the right spray wand. Or adjust the spray pattern with the universal spray wand.



POWER SPRAYERS



- 01 Twin nozzle
- 02 50 cm stainless steel spray wand
- 03 Large filling and cleaning aperture
- 04 Spray wand retainer

- 05 Ergonomically designed tank made from translucent, UV-resistant plastic with comfortable, padded backpack frame and wide shoulder straps
- Robust manual valve with silicone-dampened pressure gauge
- Powerful 2-stroke SOLO engine (434) or 4-stroke Honda engine (433)
- 08 Anti-vibration dampers
- Long high pressure hose for stress-free arm movements

POWER SPRAYERS

SOLO 434

The small, compact **2-stroke SOLO engine** is lightweight and quiet in operation. The push-pull piston pump that it drives generates a pressure of up to 20 bar. This means that 1.9 l per minute can be applied with the standard nozzle. The 50 cm long, stainless steel spray wand is durable and suitable for all plant protection spray media. The standard twin nozzle offers versatile adjustment options for flexible applications.



SOLO 433

The push-pull piston pump in the SOLO 433, driven by a 25 cm³ 4-stroke HONDA engine, generates up to 30 bar pressure. In this high pressure range, the standard nozzle can deliver up to 2.4 l/min – and thanks to the high pressure, the spray medium can also reach considerable heights. The pressure can be checked on the clearly visible pressure gauge at any time.

Additional features of the 433:

- + Up to 30 bar pressure
- + Large tank lid and extremely wide
- filling aperture (14.5 cm!)
 + Removable stainless steel filling strainer
- + Space saving vertical spray wand retainer
- + Robust, 1.5 m long high pressure hose
- + High quality, fully adjustable carrying system

4-stroke HONDA engine, 25 cm³ Stainless steel spray wand, twin nozzle and pressure gauge 20 l, 9.8 kg Part no. 43303









MISTERS

SOLO misters are amongst the most popular in the world. They are right at home and have become indispensable in agriculture, horticulture, woodland maintenance, public parks and green areas, amongst fruit and vine growers and in coffee and cocoa plantations in Africa and South America. This success does not come out of the blue:

Firstly, misters from SOLO have an impressive spraying capacity as well as being light. These characteristics make them the environmentally responsible choice for the economical protection of all crops and plantings anywhere in the world. Secondly, SOLO misters are remarkably robust and easy to handle. Thanks to all these benefits, they have been helping to bring about high yields around the globe for many years. In this, advanced engine technology

from SOLO ensures low fuel consumption, reduced exhaust gas emissions and high performance in continuous use — even when it gets very hot.

In addition to plant protection, these sprayers can also be used for disinfection and parasite control in the fields of logistics, agriculture and animal husbandry.

The range of accessories (see page 38) makes both SOLO misters, i.e. the 451 and the PORT 423, even more versatile. For example, a dusting attachment turns the PORT 423 into a brilliant dusting machine. If you need to increase the reach of SOLO misters (for example when spraying upwards), simply equip them with a liquid booster pump. This enables the use of longer spray wands, whilst keeping the spray pattern and spray volume constant.





MISTERS



- 01 Large filling and cleaning aperture; with quickaction closure on the 451
- 02 Extended reach through high air expulsion velocity
- 03 Large tank made from UV-resistant plastic. Fill level always readable through translucent tank
- Ergonomically designed control for throttle, spray volume and start/stop
- 05 Large petrol tank together with a frugal 2-stroke SOLO engine ensure long working
- Of Comfortable, ergonomically shaped backpack frame with padded straps and anti-vibration dampers
- **07** Designed for easy maintenance
- (08) Fan housing made from highly resilient plastic
- O9 Long rotating plastic spray wand, can be pivoted effortlessly in any direction
- Advanced, low-emission two-stroke SOLO engine with specially coated cylinder for a long service life of the appliances

MISTERS

SOLO 451-01



SOLO 451-02 As per 451-01, but with a tank capacity of 20 l – for even longer operating times. 66.5 cm3, 2.1 kW/2.9 HP, 1400 m3/h, 20 l, 12 kg

Part no. 45102



SOLO PORT 423

Throughout the world, the SOLO PORT 423 is the epitome of a robust and reliable mister. The powerful 72.3 cm³ 2-stroke SOLO engine delivers 3 kW. This durable mister has proven easy to service over many years.



The right nozzle for any crop:

The standard delivery of the SOLO 451 and PORT 423 includes a long reach nozzle as well as a wide spray grille and a nozzle with interchangeable deflectors. The long reach nozzle directs the spray medium over a distance of up to 12 metres (PORT 423). The spray width increases with the wide spray grille. The nozzle with single sided deflector makes it easier to spray roys of crops and also enables you to reach underneath leaves. The double sided deflector allows you to efficiently treat two rows at a time.



GRANULATE SPREADERS



Seeds, fertiliser, e.g. after scarifying, gritting salt, oil absorbers, cleaning agents, pelletised lime, bird seed, stock feed, sand ... The SOLO granulate spreader 421 is designed to be used all year round.

A manual crank drives the rotating spreader disc to guarantee precise distribution of the granulate onto the area to be treated. The integral agitator ensures that the material in the tank is mixed thoroughly. Up to 9 litres of granulated matter can be applied where specifically required, even on difficult terrain – for example where a wheeled appliance would be unsuitable. The direction in which the material is spread can be adjusted just as easily as the delivery rate. The spreader is carried in front of the body by means of an adjustable strap. The large filling aperture makes filling easy, whilst the large screw top protects users from harmful dust.

- Large filling and cleaning aperture with tightly fitting dust cap – prevents the ingress of dust
- 02 Padded shoulder strap
- 03 Large 9 litre tank

- 04 Smooth-running manual crank drive
- Robust integral agitator: hermetically sealed, 05 gearbox with angular metal gears
- Spreader disc with large fins for even application

Also suitable for winter grit (salt etc.)

9 l, 2.5 kg • Part no. 42101





Adjustable distribution direction (1), agitator (2)



Enclosed worm drive with angular metal gears



Comfortable strap



Secure base and ergonomic moulding



- 01 Comfortable carrying handle
- O2 Clean combustion engine with aluminium crankcase
- 03 Large starter handle
- **04** Single hand, multifunctional operating handle
- Fuel tank made from transparent, stable plastic, making the fill level easily visible
- 06 Stable base
- Anti-vibration system effectively reduces vibrations at body contact points Padded back support

66.5 cm³, 2.1 kW/2.9 HP, 1400 m³/h, 10 kg Part no. 46701 Maximum performance, optimum reliability and improved environmental characteristics were key factors in the development of the SOLO blower.

High blower output combined with consideration for the environment and immediate surroundings define the SOLO 467. Its comfortable backpack carrying system meets the requirements of professionals. Engine noise is reduced by a special silencer.



SPECIFICATION









Model Part no.	403 40301	404 40401	401 40101	402 40201
Piston pump	•	•	•	•
Nominal capacity litres	1.25	2.0	1.0	2.0
Spray pressure bar max.	2	2	2.5	2.5
Safety valve	•	•	•	•
Dry weight kg	0.5	0.6	0.4	0.5





				,			
Model	408	409	461	462	456	457	458
Part no.	40801	40901	46101	46290	45601	45701	45801
Piston pump	•	•	•	•	•	•	•
Nominal capacity litres	5.0	7.0	5.0	7.0	5.0	7.0	9.0
Max. spray pressure bar	2.	.0	3	.0		3.0	
Dry weight kg	1.2	1.4	1.5	1.7	2.6	2.8	3.0
Spray wand can be secured	•	•	•	•	•	•	•
Hose length m	1.	.2	1	.4	1.4	m reinforced h	iose
Spray wand	Plastic,	40 cm	Plastic	, 50 cm		Plastic, 50 cm	
Shoulder strap	Ye	es	Yes		Yes		
Nozzle	SOLO universal hollow cone nozzle, adjustable		SOLO flat spray and hollow cone nozzle		SOLO flat spray and hollow cone nozzle		

Model	453
Part no.	45301
Piston pump	•
Nominal capacity litres	11
Max. spray pressure bar	2
Dry weight kg	3.5
Transport wheels	Yes
Hose length m	2.5 (spiral hose)
Spray wand	Plastic, 40 cm
Nozzle	SOLO universal hollow cone nozzle, adjustable



Model Part no.	473D Classic 47321	425 Classic 42521	435 Classic 43521	475 Classic 47521	425 Comfort 42531	475 Comfort 47531	435 Comfort 43531	425 Pro 42541
Pump type – piston/diaphragm	-/ •	• /-	• / -	-/ •	• / -	-/ •	• /-	• / -
Nominal capacity litres	10	15	20	15	15	15	20	15
Max. spray pressure bar	4	4	4	4	4/6*	4	4/6*	4/6*
Spray wand length cm	50	50	50	50	50	50	50	50 - 90, adjustable
Manual spray pressure adjustment	-	-	-	-	•	•	•	•
Pump lever adjustable	-	-	-	-	•	•	•	•
FKM seals ("Viton®")	-	-	-	-	•	•	•	•
Telescopic carbon spray wand	-	-	-	-	-	-	-	•
Pressure gauge	-	-	-	-	-	-	-	•
Dry weight kg	4.2	4.4	5.0	4.6	4.5	4.7	5.1	5.2

SPECIFICATION





Model Part no. 417 416 Li 41601 Rechargeable battery Lead gel Lithium-ion Capacity V/Ah 12 / 7.2 11.1 / 7.8 Nominal capacity litres 18 20 Flat spray nozzle ● ● 2-stage spray pressure bar 2.5 / 4.3 2.5 / 4.3 Spray volume I/min with standard nozzle I 1.07 I 1.07 I/min with standard nozzle II 1.42 II 1.42 Operating time h I: 3.7; II: 2.3 I: 5.9; II: 3.7 Charging time h approx. 8 approx. 5.5 Dry weight kg 7.6 5.2 Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70 < 70 Sound power level guaranteed dB(A) ⁽¹⁾ < 70 < 70 Vibration value m/s² (2) ≤ 2.0 ≤ 2.0			
Capacity V/Ah 12 / 7.2 11.1 / 7.8 Nominal capacity litres 18 20 Flat spray nozzle ● 2.5 / 4.3 2.5 / 4.3 Spray volume I 1.07 I 1.07 I 1.07 I/min with standard nozzle II 1.42 II 1.42 II 1.42 Operating time h I: 3.7; II: 2.3 I: 5.9; II: 3.7 Charging time h approx. 8 approx. 5.5 Dry weight kg 7.6 5.2 Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70 < 70 Sound power level guaranteed dB(A) ⁽¹⁾ < 70 < 70		* * * * * * * * * * * * * * * * * * * *	
Nominal capacity litres 18 20 Flat spray nozzle ● 2.5 / 4.3 2.5 / 4.3 2-stage spray pressure bar 2.5 / 4.3 2.5 / 4.3 2.5 / 4.3 Spray volume I/min with standard nozzle I 1.07 I 1.07 II 1.42 II 1.42 II 1.42 Operating time h II 1.23 II: 5.9 ; II: 3.7 Charging time h approx. 8 approx. 5.5 Dry weight kg 7.6 5.2 Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70	Rechargeable battery	Lead gel	Lithium-ion
Flat spray nozzle 2-stage spray pressure bar 2.5 / 4.3 Spray volume I/min with standard nozzle Operating time h L: 3.7; II: 2.3 Charging time h Dry weight kg 7.6 Spray wand Plastic, 50 cm Standard delivery Sound pressure level dB(A)¹¹¹ Sound power level guaranteed dB(A)¹¹¹ 2.5 / 4.3 2.5 / 4.2 2.1 / 4.2 2.1 / 4.2 2.1 / 4.2 2.1 / 4.2 2.1 / 4.2 2.1 / 4.2 2.1 / 4	Capacity V/Ah	12 / 7.2	11.1 / 7.8
2-stage spray pressure bar 2.5 / 4.3 2.5 / 4.3 Spray volume I/min with standard nozzle I 1.07 I 1.07 I/min with standard nozzle II 1.42 II 1.42 Operating time h I: 3.7; II: 2.3 I: 5.9; II: 3.7 Charging time h approx. 8 approx. 5.5 Dry weight kg 7.6 5.2 Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70	Nominal capacity litres	18	20
Spray volume	Flat spray nozzle	•	•
I/min with standard nozzle II 1.42 II 1.42 Operating time h I: 3.7; II: 2.3 I: 5.9; II: 3.7 Charging time h approx. 8 approx. 5.5 Dry weight kg 7.6 5.2 Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70	2-stage spray pressure bar	2.5 / 4.3	2.5 / 4.3
Charging time h approx. 8 approx. 5.5 Dry weight kg 7.6 5.2 Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70			
Dry weight kg 7.6 5.2 Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70	Operating time h	l: 3.7 ; l l: 2.3	1: 5.9 ; 1 1: 3.7
Spray wand Plastic, 50 cm Adjustable, 50-90 cm, carbon Standard delivery Pressure gauge Pressure gauge, hip strap Sound pressure level dB(A) ⁽¹⁾ < 70	Charging time h	approx. 8	approx. 5.5
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	Dry weight kg	7.6	5.2
Sound pressure level dB(A) ⁽¹⁾ < 70	Spray wand	Plastic, 50 cm	Adjustable, 50-90 cm, carbon
Sound power level 470 470 470	Standard delivery	Pressure gauge	Pressure gauge, hip strap
guaranteed dB(A) ^(t) < 70 < 70	Sound pressure level dB(A)(1)	< 70	< 70
Vibration value m/s ^{2 (2)} ≤ 2.0 ≤ 2.0		< 70	< 70
	Vibration value m/s ^{2 (2)}	≤ 2.0	≤ 2.0





Model	434	433
Part no. Engine	43401 2-stroke SOLO	43303 4-stroke Honda GX 25
Capacity cm ³	28.9	25
Nominal capacity litres	18*	20
Stainless steel twin nozzle	•	•
Max. adjustable spray pressure bar	up to 20	up to 30
Spray volume l/min with standard nozzle	1.0 l at 5 bar 1.4 l at 10 bar 1.9 l at 20 bar	1.0 l at 5 bar 1.4 l at 10 bar 1.9 l at 20 bar 2.3 l at 30 bar
Dry weight kg	9.3	9.8
Pressure gauge	•	•
Standard delivery	Stainless stee	l spray wand
Sound pressure level dB(A) ⁽¹⁾	92.4	82
Sound power level dB(A)(1)	99.2	95
Vibration value m/s ^{2 (2)}	≤ 2.0	≤ 2.0

^{*}With 25 litre tank, part no. 43402 (not available in the EU)








Model Part no.	451 45101	451-02 45102	Port 423 42311 • 42313 (EU)		
Engine	2-stroke SOLO	2-stroke SOLO	2-stroke SOLO		
Capacity cm ³	66.5	66.5	72.3		
Power kW/HP	2.1 / 2.9	2.1 / 2.9	3.0 / 4.1		
Decompression valve	•	•	-		
Tank capacity (nominal) litres	13 (12)	21 (20)	12 (10)		
Max. air flow rate m³/h*	1400	1400	1400		
Horizontal reach in m	11.5	11.5	12		
Dry weight kg	11.8	12.0	11.0		
Standard delivery	SOLO special misting nozzle with 4 settings, long reach nozzle, wide spray grille, single sided and double sided deflector				
Sound pressure level dB(A)(1)	97	97	97		
Sound power level LWAeq dB(A)(1)	106	106	110		
Vibration value m/s ^{2 (2)}	≤ 2.5	≤ 2.5	≤ 6.3		





Model Part number	467 46701
Engine	2-stroke SOLO
Capacity cm ³	66.5
Decompression valve	•
Max. fan rate m³/h*	1400
Air velocity m/s	92
Anti-vibration system	•
Weight kg	10.0
Sound pressure level dB(A)(1)	97
Sound power level guaranteed dB(A)(2)	106
Vibration value m/s ²	≤ 2.5

Model	421
Part no.	42101
Capacity I	9
Tank filling aperture diameter cm	14.5
Dry weight kg	2.5
Dimensions excl. crank W x D x H, cm	29 x 26 x 49
Distribution range subject to material, cm	Granulate approx. 300 - 400 Grass seed approx. 180 - 200
Distribution width subject to material, cm	Granulate approx. 180 - 200 Grass seed approx. 150 - 170
Gearbox	Hermetically sealed worm drive with angular metal gears
Transmission ratio	1 : 7.5


^{*}Excl. blower

^{*}Excl. blower

Spray wands for pressure and backpack sprayers

•	Recommer	nded	•	Suitable	•		Not red	commer	nded	Τ.	- Unsuitable / does not fit					
Pos.	Designation	Description a	nd re	ecommended application	Par	t no.		403 404	408 409 453	401 402	461 462	456 457 456 PRO 458	425 435	473 D 475	416 Li 417	
1	Telescopic wand 25-50 cm	extended to u nozzle and sm makes it easier further away head can be p convenient and affected leave plastic, impact-	Telescopic spray wand, can be continuously extended to up to 50 cm, with adjustable universal nozzle and small drift guard. The telescopic function makes it easier to reach parts of plants that are further away or concealed. For example, the nozzle nead can be pivoted through 180°, making it convenient and effective to treat the underside of affected leaves. The telescopic wand consists of a plastic, impact-resistant, profiled outer tube and a high grade, robust, stainless steel inner tube.					1	1	•	•	-	1	-	-	
2	Spray wand 50 cm with flat spray nozzle	retainer, high and union nut wand is flexible quality plastic t for universal us	grad for a and hat d e in i	d 50 cm, including angled nozzle e flat spray nozzle, filter strainer attachment to the manual valve. Spray almost unbreakable thanks to high an withstand extreme loads. Suitable many plant protection applications.	494			•	•	•	•	•	•	•	•	
3	Extension wand 50 cm	that simply re a connection no SOLO standard sprayers with a Almost unbreal	quir ut wi spra non kable	extension wand for all applications e an extended reach. It includes th seal ring for attachment to all y wands, for pressure and backpack inal capacity of 5 litres or more. thanks to high quality plastic d extreme loads.	495	513		1	•	1	•	•	•	•	•	
4	Brass spray wand, 50 cm	applications t We also recommaccessories su 50 cm brass spi	hat mend ich a ray v ete v	intensive and professional require robust, rigid spray wands. If it for working with SOLO is spray booms or drift guards. The vand has a diameter of 8 mm and is with union nut for attachment to the	495	519		1	•	1	•	•	•	•	•	
5	Universal spray wand, 50 cm NEW!		nufa	backpack sprayers from SOLO and cturers. Including adjustable universal y nozzle.		510		-	•	-	•	•	•	•	-	
6	Brass spray wand, 75 cm	applications t wands. The 75	hat cm l	intensive and professional require robust, rigid spray ong spray wand can be optimally SOLO accessories such as drift guards.	494	128		-	•	-	•	•	•	•	•	
7	Brass telescopic spray wand 57 - 100 cm	can be continue locked in any p challenging or extended reach recommended guards. The tele	ously com h or for v	escopic spray wand made from brass extended up to 100 cm and ion. It can be put to flexible use in any mercial application, to enable an to treat ground level areas. Also working with spray booms or drift ic spray wand is supplied complete with nent to the SOLO manual valve.	494	178			•		•	•	•	•	•	
8	Brass tree spray wand, 150 cm	challenging ap wand with an treating very t or bushes. The brass tube of	plica exte all p consisi iame	vand is ideally suited to all ations that require a robust, rigid nded reach. We also recommend it for lants, e.g. for spraying espaliered trees sts of two 75 cm threaded spray wands ter, including two union nuts and seals		528		-	•	-	•	•	•	•	•	
9	Carbon tree spray wand 120 cm	fibre material v challenging ap lightweight wa Thanks to its ver suitable for lon with union nut fo	weigh plica nds y low nger or att	ray wand made from carbon is just 100 g. It can be used for all tions that require rigid and extremely – even with an extended reach. weight, it protects the joints and is working periods. Supplied complete achment to the SOLO manual valve.				-	•	-	•	•	•	•	•	
10	Carbon telescopic spray wand 60 - 120 cm	ultra-light carbo recommend this that require a with adjustabl working with a guards. Long w wrists are no pro	on fib vers rigid e rea acces orkir obler	g telescopic spray wand made from re material weighs just 95 g. We ion for all challenging applications and extremely lightweight wand ach. It is also recommended for ssories such as spray booms or drift g periods with minimal strain on the n. The standard delivery includes the nent to the SOLO manual valve.	494	157		-	•	-		•	•	•	•	

Pos.	Designation	Description and recommended application	Part no.	04	408 409 453	401 402	461 462	456 457 456 PRO 458	425 435	473 D 475	416 Li 417
11	Carbon telescopic spray wand 120 - 230 cm	The telescopic spray wand made from ultra-light carbon fibre material weighs just 160 g and is continuously adjustable in length from 120 - 230 cm. It can be used for all challenging applications that require rigid and extremely lightweight wands with a very long reach. The low weight greatly facilitates the work and protects the joints, enabling long periods of use. Supplied complete with union nut for attachment to the SOLO manual valve.		-	•	-	•	•	•	•	•
12	Flexible spray wand extension 15 cm	Flexible and ideally suitable for treating inaccessible areas and places that are not easily visible or are difficult to reach, including use in pest control, for example. With the pliable spray wand section that can be bent by up to 180°, the jet can be sprayed in any direction. Including connection nut for fastening to an existing spray wand end piece, without nozzles. Can be combined with all SOLO spray wands and spray nozzles; the union nut for attachment is included.	49450	-	•	-	•	•	•	•	•
13	Flexible double spray head 60 cm	The double spray head has many possible applications, e.g. for treating a plant or row of plants from two sides at once, or for spraying two rows at the same time. With its twin nozzles, it can be used for treating single plants and to apply repellent spray to protect against browsing animals. With its two flexible spray wands, the double spray head has a total operating width of 60 cm. It comes complete with nuts to connect to each spray wand, prefitted hollow cone spray nozzles and two further sizes of hollow cone nozzle. Other types of nozzle in different sizes can also be fitted if preferred.	49411	-	•	-	•	•	•	•	•
14	Spray boom 60 cm	The 60 cm wide spray boom has two prefitted flat spray nozzles and is ideal for treating two rows or spraying large areas. Made from special, almost unbreakable plastic, supplied with two ball valve nozzle filters to prevent dripping and a union nut for attachment to an existing spray wand. We recommend combining it with the SOLO short, rigid, brass or carbon fibre spray wands.	49514	-	•	-	•	•	•	•	•
15	Aluminium spray boom 120 cm	For treating larger areas, we recommend twice the spraying width with the 120 cm wide, light, aluminium spray boom. Four flat spray nozzles and four ball valve nozzle filters to prevent dripping are prefitted. It can be ideally combined with the SOLO short, rigid, brass or carbon fibre spray wands. The union nut for attachment to the spray wand is provided.	49299	-	•	-	•	•	•	•	•

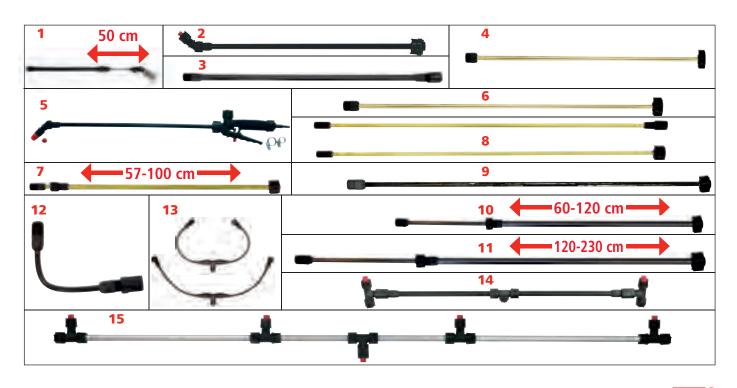

Nozzles and drift guards for pressure and backpack sprayers


•	Recommer	ded Suitable	•	Not recomm	ended	-	U	nsuitab	le / do	es not f	it
Pos.	Designation	Description and recommended applicati	on Part no.	40 40		401 402	461 462	456 457 456 PRO 458	425 435	473 D 475	416 Li 417
1	Full nozzle set	Universal nozzle set for all the most imp application areas. The set contains a total of different, high grade flat spray, deflector hollow cone nozzles. Four flat spray nozzles for treating large spraying rows. With a ribbon-like spray patte 015, 02, 03 and 04. Two deflector nozzles especially for appherbicides: for treating large areas and wor low pressure range with a coarse droplet size like spray pattern. The nozzles come in sizes DT 2.5. Three hollow cone nozzles for treating shrubs and large scale plantings that exidirections, especially for insecticides and The three matching nozzle caps have hole size and 1.8 mm in combination with the require The nozzle set includes a nozzle retainer w flat spray nozzle.	of nine r and areas and rn in sizes lying king in the e and ribbon- DT 1.0 and ingle plants, tend in all d fungicides. zes 1.0, 1.4 d swirl plate.		•	-	•	•	•	•	
2	Universal plastic nozzle, adjustable	The universal hollow cone nozzle made from especially suitable when treating single pla be adjusted from fine droplets with a hollo shaped spray pattern, right through to a	nts. It can ow cone-	-	•	-	•	•	•	•	•
3	Universal brass nozzle, adjustable	The universal hollow cone nozzle made from especially suitable when treating single pla extend in all directions. It can be variably a fine droplets right through to a point jet.	nts that djusted from	-	•	-	•	•	•	•	•
4	Oval drift guard 30 x 11.5 cm	The oval plastic drift guard should be used for herbicide over larger areas and for precispraying in edge areas. The drift guard hel fine droplets unintentionally drifting intareas containing crops or bodies of wate equipped with a flat spray nozzle for a rispray pattern and is effectively limited at the umbrella shape. The transparent design contained a section has been redesigned to give users visibility of the area to be treated whilst recommend combining it with a 75 cm brass or short telescopic spray wands.	ps prevent o adjacent er. It is obon-like ne sides by of the guard optimum working. We	-	•	-	•	•	•	•	•
5	Round drift guard Ø 15 cm	We recommend the round drift guard with UV protection for targeted, accurate herbicide and for use on various smaller plots. Its p full cone nozzle ensures a circular spray p. The guard effectively restricts the spraying rar prevent fine droplets unintentionally drif adjacent areas containing crops or bodie. The round drift guard is also made from trans durable plastic for optimum visibility of the treated.	application refitted pattern. nge to help ting into s of water. parent,	-	•	-	•	•	•	•	•

							403 404	408 409 453	401 402	461 462	456 457 456 PRO 458	425 435	473 D 475	416 Li 417
6	Dual nozzle with nozzle set	with telescopic or exte two rows of plants to treat the undersi	range of applic ension wands, it e at once or spray de of leaves or r ozzle retainers a tandard delivery ne nozzles for la nozzles for treat imy plugs to allow knurled screw, th	ations. In conjunction mables users to treat at an angle, e.g. to reach awkward be pivoted through includes two rge scale plantings ing large areas. The one nozzle to be edual nozzle can be	49477		-	•	-	•	•	•	•	•
1		00	2	3		4	L			5	4			6



Sets of seals for pressure and backpack sprayers

•	Recommen	nded	•	Suitable	•	N	lot reco	mmen	ded	-	U	Unsuitable / does not fit			
Pos.	Designation	Description a	nd re	commended application	Par	't no.		403 404	408 409 453	401 402	461 462	456 457 456 PRO 458	425 435	473 D 475	416 Li 417
1 -	Standard set of seals	Contains all st models 461 an		rd seals for SOLO pressure sprayer 2.	49	551		-	-	-	•	-	-	-	-
I-	Standard set of seals	Contains all sta models 456, 45		rd seals for SOLO pressure sprayer d 458.	49	441		•	•	•	•	•	-	1	•
3	Standard set of seals			rd seals for SOLO backpack sprayer 5 with piston pump.	49	442		-	-	-	1	-	•	1	-
4	FKM set of seals	456 Pro, 457 a	and 4 ("Vi	r SOLO pressure sprayer models 456, 158. Made from highly resistant ton ®"). Standard equipment level for LO 456 Pro.	49	577					1	•	-	1	•
5	FKM set of seals	425 and 435 v resistant FKM	with I mat el for	r SOLO backpack sprayer models piston pump. Made from highly erial ("Viton®"). Standard all SOLO backpack sprayer models in categories.	49	578		-	-	-	-	-	•	-	-
-	Standard set of seals	models 475 an	nd 47 o diap	rd seals for SOLO backpack sprayer 3D Classic with diaphragm pump. bhragms made from special, highly laterial (TPV).	49	443					-	-	-	•	
7	FKM set of seals	and 473D Cla highly resista diaphragms ma	ssic v nt Fk ade fi ial. S	r SOLO backpack sprayer models 475 with diaphragm pump. Made from (M material ("Viton®"). Including om special, highly resistant tandard equipment level for SOLO 5 Pro models.		579		-	-	-	-	-	-	•	-

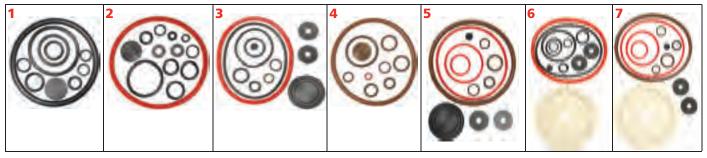

Other accessories

•	Recomme	nded	•	Suitable	•		Not reco	ommen	ded	-	- Unsuitable / does not fit				
Pos.	Designation	Description a	nd r	ecommended application	Par	t no.		403 404	408 409 453	401 402	461 462	456 457 456 PRO 458	425 435	473 D 475	416 Li 417
1	Manual valve set	design made f and connection	rom n for	ial valve. Robust, ergonomic special plastic. With childproof lock installing a pressure gauge (optional). ecessary for installation.	494	440		-	•	-	•	•	•	•	•
2	Pressure gauge	highly accurat with permane readable disp psi) in 0.2 bar gauge against is equipped wit	te ment splay rincr incr timp	professional pressure gauge for easurements and readings, used bray pressure control. The easily ange goes from 0 to 6 bar (0-90 ements. To protect the pressure act and ensure safe handling, it arge, removable rubber cover with delivery includes union nuts and seal	493	356		-	•		•	•	•	•	•
3	Ball valve filter	shut off, we re stainless steel f spray wands ar the spray nozzl equipment leve	To prevent dripping after the manual valve has been shut off, we recommend using the ball valve filter with stainless steel filter insert — especially when telescopic spray wands are used. Straightforward insertion below the spray nozzle, instead of the standard filter. Standard equipment level for SOLO spray booms 49514 and 49299. Opening pressure 0.3 bar. Mesh size 50 mesh, ISO-					-	•	-	•	•	•	•	•
4	Pro backpack carrying system	makes safe and sprayers even exprayers even exports sector, it to the balance shoulders and straps with courthe shoulder's wearing comfor The carrying sys 12 litre and 15 models) and is	I tire asier the l it off d dis hips mfor traps t, aki tem j litre part	dessional backpack carrying system less working with SOLO backpack over longer operating periods. The left of experts from the outdoor ers maximum user comfort thanks tribution of weight over the High quality materials, wide table padding and ventilation of and integral hip belt ensure perfect to that of a modern hiking rucksack. Its all SOLO backpack sprayers with the tank volumes (including older of the standard equipment level for the kpack sprayer models.	495	599			-		-		•	•	•
5	Compressed air connection valve	having to pur cushion of air t working perio spray pattern connection va air supply to an integral, aut	np no but ods voluments. The ods contact of the ods to market of the ods	puild-up of pressure saves you lanually. Allows a large pressurised ild up quickly and easily for longer whilst maintaining a professional pivoting compressed air enables an external compressed onnected to the sprayer and has tic overpressure valve. It fits SOLO idels 456, 457 and 458.	495	590		-	-	-	-	•	-	-	-
-	Charging cable	from SOLO ba	itter	external charging of the batteries y-operated backpack sprayer 1 417, e.g. if a second battery is used.	497	789		-	-	-	-	-	-	-	•



Accessories for power backpack sprayers


Suitable

Not recommended

•	Recommended	•	Suitable	•	Not recommended	-	Unsuit	able / does no	t fit
os.	Designation	Descript	tion			Part	no.	433	434
	Extension wand, 120 cm stainless steel	that req i ensure sa attached	uire a considerably extended re afe handling, it is equipped with ar to the existing manual valve. Can	ach, e.g. n easy gr i also be u	om stainless steel for all application for very tall espaliered trees. To plastic sleeve and can be simply sed in combination with the Orange of high pressure sprayers.		83	•	•
2	Spray wand, 120 cm with shut-off tap and stainless steel changeover nozzle	is suitab recomme spraying of stand be adjus selector of and fine Including	ple for all professional assignmen and this wand for high precision sp trees in orchards and horticultu lard spray wand and manual valv ated using the rotating selector at th	ts that re praying an ral applice. Flow ra e handhel nitial broa and then to s in differe	ations. Straightforward exchange ate, spray pattern and reach can d end of the spray wand: turning the ad hollow cone with a short reach to a full jet with a greater reach. ent sizes. At a higher pressure, the		85	•	•
3	Telescopic extension wand, 120 - 240 cm Stainless steel	that req The leng the large	uire a considerably extended re	ach, e.g. ween 12 el. A plas	0 and 240 cm and is locked using	491	89	•	•
1	Spray boom with 4 nozzles Stainless steel	plants. F	dy, stainless steel spray boom is sui Four prefitted nozzles, one 75 cm st hment to the existing manual valve	ainless st		493	00	•	•
5	Twin nozzle Stainless steel	SOLO 43	nozzle is suitable for universal us 3 and 434 backpack power spraye he two individual prefitted nozzles es .	rs. The no	zzle retainer is made from robust	491	82	•	•
5	Extension hose 10 m with retaining bracket	- even v to rema extension		nts where mfort an racket fits	the power sprayer itself has d safety. The robust, high pressure the filling aperture of the SOLO 433	491	91	•	•
1	•					-1			
2	Ø 2,2 mm + Ø 2.2 mm + Ø 2.7 mm						-		
3					P Mary return trans	- 1/2	F INTER SHEET, FAMOU		
4	•		•		-			-8	
5			solo					_	

Accessories for power misters

•	Recommended	(Suitable	•	Not recommended	-	Unsuitabl	e / does no	t fit
Pos.	Designation	Desc	ription			Part	t no.	423	451
1	Dusting attachment	49233		•	-				
2	ULV nozzle with metering device	enabl apply and s	ILV nozzle with metering device for the SC les conversion to misting using the UL ying very high concentrations of spray small droplets. All the necessary parts, so al plastic and the metering device are incl	V (ul v liq u uch a	tra-low volume) procedure, i.e. uid in extremely small quantities as a special nozzle, hoses made from	494	79	•	•
3	Twin nozzle	and e separ 90° v during spray for ex	the aid of the twin nozzle, the spray patenlarged. The amount of spray liquid sugartely. The angle between the two mist without using tools, i.e. the spray patter g misting. This makes it suitable for very to completely separating it to be absample when treating two rows at the hments enlarge the jets, which can be benting, for example.	ing in ca rersa le to sam	d can be regulated at each nozzle nozzles can be adjusted from 0° to n be altered from parallel to 90° even tile applications, from enlarging the paray in two different directions, the time. The removable broad spray	491	37	•	•
4	Extension wand	as ex use o	the 60 cm extension wand, the spray c ttended, which is helpful when sprayi f a SOLO liquid booster pump (accessory) the extension wand, in order to ensure a ing vertically.	ng t is h	argets some distance away. The ighly recommended in conjunction	493	33	•	•
5	Liquid booster pump	plant	ecommend using the liquid booster pump ings that predominantly require an up	war	d spray direction or a greater	491	17	•	-
			n. It enables a reliable supply of spray liq extension wand 49333.	uid e	specially when spraying vertically and	492	35	-	•

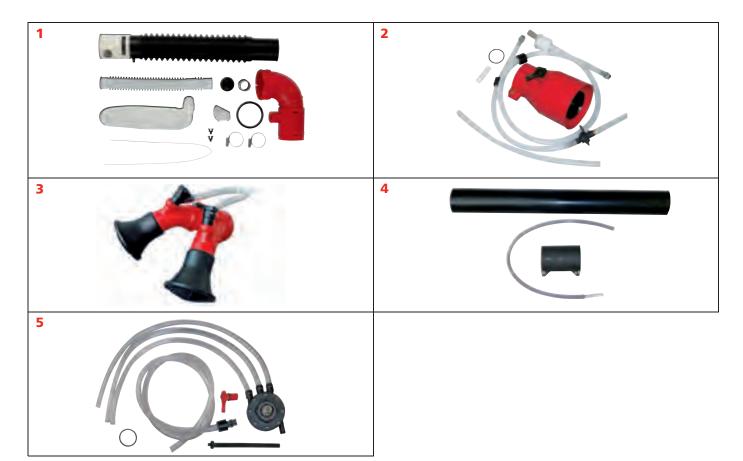

Engine oils, special maintenance oil and accessories

•	Recommended	Suitable Not recom	mended	-	Unsui	table	does	not fi	t
	Designation	Description	Part no.		433	434	423	451	467
1	SOLO Profi 2T engine oil 100 ml (for 5 litres of two-stroke fuel mixture)	Semi-synthetic universal engine oil with fuel stabiliser. Contains cleaning and corrosion-inhibiting additives. Suitable for mixture lubrication and separate lubrication of all air and water-cooled two-stroke engines. The dissolving agents it	49103		-	•	•	•	•
2	SOLO Profi 2T engine oil 1 litre (for 50 litres of two-stroke fuel mixture)	contains ensure automatic and even mixing with the fuel. - Prevents the fuel mixture ageing - Enables trouble-free engine start even after standing for long periods - Protects against corrosion	49104		-	•	•	•	•
3	SOLO Profi 2T engine oil, metering bottle, 1 litre (for 50 litres of two-stroke fuel mixture – easy to meter)	- Keeps the fuel system clean - Excellent ignition capability 2 years; even longer for high grade fuel Specifications: JASO FD, ISO-L-EGD, API TC, GLOBAL GD Mixing ratio 1:50 (observe instructions from appliance manufacturer)	49105		-	•	•	•	•
4	Mixing container 1 litre	Practical, compact mixing container for topping up fuel without spills or drips, and practical mixing of 2-stroke fuel mixture (petrol/oil). Including funnel and measuring cap. The funnel makes it easier to fill the tank, even in the case of narrow filler necks. Hard to lose: when not in use, the funnel can be inserted into the mixing container and held in place with the screw cap. The cap can also help to achieve an accurate ratio for 2-stroke fuel: 1 cap full of two-stroke oil to 1 litre of petrol results in a mixing ratio of 1:50.	49278		-	•	•	•	•
5	Plant protection sprayer cleaning agent, metering bottle, 500 ml	Regularly cleaning your SOLO plant protection sprayers helps to keep them in good working order for a long time to come. For this, use our special cleaning agent concentrate to safely and reliably remove spray liquid residues and other contaminants from plant protection sprayers, as well as accessories and appliance components, such as nozzles and filters. It is also practical for cleaning hard to reach areas inside tanks and containers. Depending on the water hardness, a solution of 0.5 % to 1 % in water is sufficient. The cleaning agent is easy to use thanks to the practical metering bottle: simply squeeze the bottle gently to fill the metering chamber with 10 to 25 ml of cleaning concentrate, then mix into 1 to 5 litres of water. Can also be used for external cleaning tasks.	49600		SC)LO pl	able fo ant pr praye	otecti	on



German quality worldwide



SOLO Kleinmotoren GmbH was founded in Stuttgart in 1948 and to this day is still a leading global manufacturer of high grade sprayers and misters, blowers and cut-off machines — all featuring the high German quality standards you have come to expect from us.

In addition to our head office in the south German town of Sindelfingen, we have partners and subsidiaries around the world, ensuring we meet our customers' requirements. Quality and proximity to customers are the reasons why SOLO products are used in almost every country in the world.

Are you looking for sprayers or foam sprayers specially designed for cleaning? Request our new **CLEANLine** brochure and ask your local SOLO partner.

We are happy to advise you:



THE BETTER CHOICE. SINCE 1948.
German quality sprayers and cut-off machines

SOLO Kleinmotoren GmbH Postfach 60 01 52 71050 Sindelfingen, Germany Telephone + 49 70 31 / 301 - 0 Fax + 49 70 31 / 301 - 149 Email: info@solo-germany.com www.solo.global

Subject to technical modifications.

70 142 1/2018

