


CONTRACTOR

TWO PART SKELETON HINGE JIG

Made from aluminium extrusion for strength and light weight for easy transport. To recess hinges in wooden doors and frames. Clean and accurate recesses are achieved every time with minimal set-up time, both on-site and in joinery shops.


- Fully adjustable quick release aperture blocks.
- Adjustable edge guides with three preset hinge widths.
- Suitable for timber based doors and square butt hinges.
- No need for marking out in conventional way.
- Use with a light duty router with 1/4" collet and long reach router cutter 12mm dia. x 70mm overall length.
- Jig thickness allows it to be used on frames with a maximum 25mm thick fixed stop fitted.
- Can be used to fit new door in an old frame. Ideal for renovation work.

H/JIG/C (two piece) £267.35

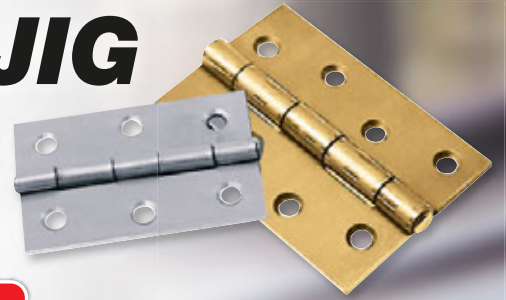

FEATURES:

- With fully adjustable quick release apertures.
- Fully adjustable hinge recesses.
- Can be used on max. 25mm thick fixed stops.
- Also suitable for fire doors.
- Adjustable stops plus three preset stop positions for 20mm, 25mm & 30mm hinge leaf.

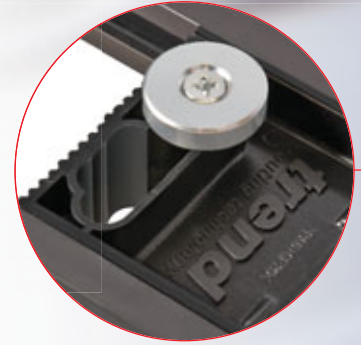

Adjustable stops plus three preset stop positions for 20mm, 25mm & 30mm hinge leaf.



COMPATIBILITY
www.trend-uk.com/compatibility



trend-uk.com/video



Large pivot plate



2mm guide bush offset built in making hinge length setting easier.

INCLUDES:

- 3 x Aperture block assemblies
- 4 x Bradawls (short blade)
- 1 x 16mmØ guide bush
- 1 x Fabric storage case




SPECIFICATION:

| | |
|-----------------------------|------------------|
| Weight | 2.9kg |
| Hinge sizes possible | |
| Length min. | 2-5/8" (67mm) |
| Length max. | 5" (127mm) |
| Width min. | 1/2" (12.7mm) |
| Width max. | 1-3/8" (35mm) |
| Door sizes possible | |
| Height min. | 6' 5" (1956mm) |
| Height max. | 6' 10" (2100mm)* |
| Thickness min. | 5/8" (16mm) |
| Thickness max. | 2" (51mm) |

* Please note for doors over 2040mm the bottom hinge will be higher than 9" up.

TECHNICAL DIAGRAM:

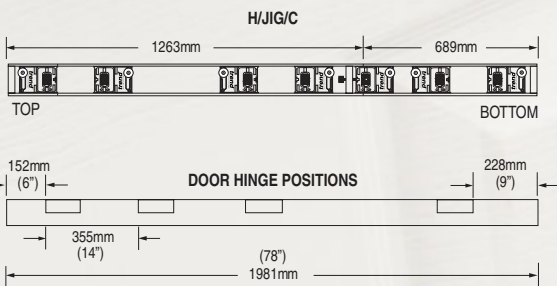

REPLACEMENT PARTS:

| | Product Ref. | Price |
|-----------------------|------------------|--------|
| 1. Special guide bush | GB160 | £11.92 |
| 2. Bradawl | WP-HJ/09B | £5.42 |
| 3. Fabric carry case | CASE/HJ/C | £22.23 |



OPTIONAL ACCESSORIES:

| | Product Ref. | Price |
|--------------------------------------|--------------------|--------|
| Universal sub-base | UNIBASE | £20.51 |
| Professional 12mmØ long reach cutter | 3/8LX1/4TC | £30.30 |
| CraftPro 12mmØ long reach cutter | C019AX1/4TC | £20.25 |
| T4 guide bush 16mmØ x 10mm | GB/T4/160 | £11.92 |



Certain makes & models of router including the T4 will require a Unibase to accept the guide bushes. The T4 alternatively can use Ref. GB/T4/160 guide bush.

Patent No. GB2490139